


# TOPROCK® DD PLUS

Bitumen-coated Flat Roof Insulation



ROCKWOOL TOPROCK® DD Plus is a high-density, bitumen-coated stone wool insulation board for low-slope roof applications. It is compatible as the substrate for the following membrane attachment types: torched, hot mopped and self-adhered.


It has excellent acoustic properties and can be used either as a top layer of thermal insulation in an assembly with TOPROCK® DD or as the top layer of a hybrid roof assembly with polyisocyanurate or other roof insulations.

TOPROCK® DD Plus has exclusive stone wool dual-density properties that feature a higher-density top layer, providing strong point load resistance and effective load distribution to minimize puncture damage to the membrane – particularly during installation.

Learn more at [rockwool.com](http://rockwool.com)

## Simplified Application

A pre-applied coating makes it compatible with both torch and mop applied membranes and simplifies the application process – saving time and costs.

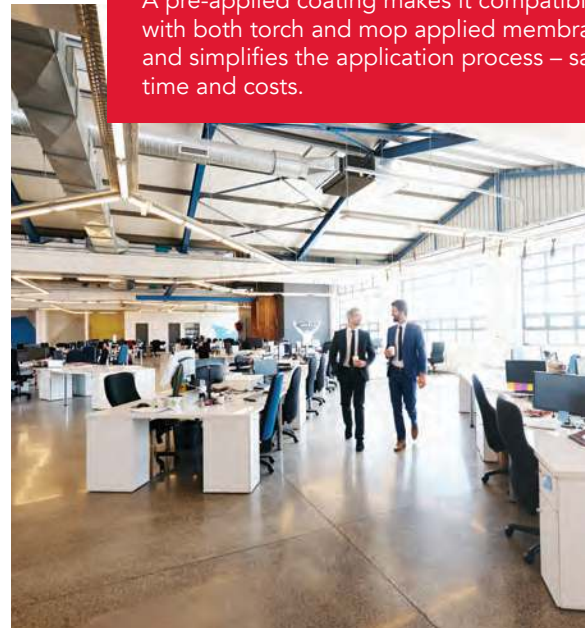

# TOPROCK® DD PLUS

## Bitumen-coated Flat Roof Insulation

### Technical Data Sheet

Roof Insulation 07220\* • Roof Insulation 07 22 00\*\*  
Mineral Wool Board Insulation 07 21 13\*\*

ROCKWOOL TOPROCK® DD PLUS is a dual-density, bitumen-coated, mineral wool insulation board for flat roofing applications.

	Performance	Test Standard															
Compliance	Standard Specification for Mineral Fiber Roof Insulation Boards Approval Standard for Single Ply, Polymer Modified Bitumen Sheet, Built-Up Roof and Liquid Applied Roof Assemblies for use in Class 1 and Noncombustible Roof Deck Construction NCC (Non Combustible Core) Rated Roof Insulation	ASTM C726*** FM 4470  FM 4470															
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Standard Method of Fire Tests for Determining Heat Release Rate of Roofing Assemblies with Combustible Above Deck Roofing Components - Class 1 Fire Tests of Roof Coverings - Class A Fire Spread under Roof Deck Assemblies - See ULC Directory Standard Test Methods for Fire Tests of Roof Coverings - Class A Fire Tests of Building Construction and Materials - See UL Directory	ASTM E84 (UL 723)*** CAN/ULC S102*** CAN/ULC S114 NFPA 276  CAN/ULC S107-03 CAN/ULC S126-06 UL 790 (ASTM E108) UL 263 (ASTM E119)															
Density	Top Layer - 13.75 lb/ft <sup>3</sup> (220 kg/m <sup>3</sup> ) Bottom Layer - 10 lb/ft <sup>3</sup> (160 kg/m <sup>3</sup> ) - for 2" (50.8mm) and 2.5" (63.5mm) thickness Bottom Layer - 9.36 lb/ft <sup>3</sup> (150 kg/m <sup>3</sup> ) - for >2.5" (63.5mm) thicknesses	ASTM C303 ASTM C303 ASTM C303															
Dimensional Stability	Linear Shrinkage - 0.71% @ 1200°F (650°C) Linear Change 7 days @ -40°F (-40°C), ambient RH - 0.1% Linear Change 7 days @ 200°F (93°C), ambient RH - 0.1% Linear Change 7 days @ 158°F (70°C), 97% RH - 0.0%	ASTM C356 ASTM D2126															
Hail Performance	Test Standard for Susceptibility to Hail Damage - Class 1 - SH (Severe Hail) Impact Resistance by Impacting with Freezer Ice Balls - Class 4 Impact Resistance of Prepared Roof Covering Materials - Class 4	FM 4470 FM 4473 UL 2218															
Thermal Resistance	<table border="1"> <thead> <tr> <th>Mean Temperature</th> <th>R-Value</th> <th>RSI Value</th> </tr> </thead> <tbody> <tr> <td>75°F (24°C)</td> <td>3.8 hr.ft<sup>2</sup>.F/Btu</td> <td>0.68 m<sup>2</sup>K/W</td> </tr> <tr> <td>25°F (-4°C)</td> <td>4.3 hr.ft<sup>2</sup>.F/Btu</td> <td>0.74 m<sup>2</sup>K/W</td> </tr> <tr> <td>40°F (4°C)</td> <td>4.2 hr.ft<sup>2</sup>.F/Btu</td> <td>0.72 m<sup>2</sup>K/W</td> </tr> <tr> <td>110°F (43°C)</td> <td>3.6 hr.ft<sup>2</sup>.F/Btu</td> <td>0.64 m<sup>2</sup>K/W</td> </tr> </tbody> </table>	Mean Temperature	R-Value	RSI Value	75°F (24°C)	3.8 hr.ft <sup>2</sup> .F/Btu	0.68 m <sup>2</sup> K/W	25°F (-4°C)	4.3 hr.ft <sup>2</sup> .F/Btu	0.74 m <sup>2</sup> K/W	40°F (4°C)	4.2 hr.ft <sup>2</sup> .F/Btu	0.72 m <sup>2</sup> K/W	110°F (43°C)	3.6 hr.ft <sup>2</sup> .F/Btu	0.64 m <sup>2</sup> K/W	ASTM C518 (C177)
Mean Temperature	R-Value	RSI Value															
75°F (24°C)	3.8 hr.ft <sup>2</sup> .F/Btu	0.68 m <sup>2</sup> K/W															
25°F (-4°C)	4.3 hr.ft <sup>2</sup> .F/Btu	0.74 m <sup>2</sup> K/W															
40°F (4°C)	4.2 hr.ft <sup>2</sup> .F/Btu	0.72 m <sup>2</sup> K/W															
110°F (43°C)	3.6 hr.ft <sup>2</sup> .F/Btu	0.64 m <sup>2</sup> K/W															
Reaction to Moisture	Moisture Sorption - 0.15% Water Absorption - <1.0% Water Vapor Transmission, Desiccant Method - 2330 ng/Pa.s.m <sup>2</sup> (41 perm)	ASTM C1104 ASTM C209 ASTM E96															
Compressive Strength	Top Layer - 20psi (140kPa) @ 10%, 37psi (250kPa) @ 25% Entire Board - 11psi (75kPa) @ 10%, 15psi (105kPa) @ 25% Point Load @ 5 mm Compression - 30psi (205 kPa)	ASTM C165  EN 12430															
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665															
Thickness Dimensions	Product available in 2" - 4" (50.8 mm - 101.6 mm) in 1/2" (12.7 mm) increments 48" x 48" (1219 mm x 1219 mm)																

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
2"	0.5	0.71	0.85	0.9	0.96	1.01	0.85	

Acoustical Performance

Contact ROCKWOOL for STC rated assemblies

ASTM E90



Issued 01-01-18  
Supersedes 08-23-17

NOTE: \*Master Format 1995 Edition \*\*Master Format 2004 Edition\*\*\*. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3  
Tel: 800-265-6878 • Fax: 800-991-0110  
rockwool.com